

STRAPPER MARINE

*FOR THE FISH
AND MEAT
INDUSTRY*

*Automatic and semi-
automatic strapping
machines*

*Made of stainless
steel*

Welding
guarantee



simple and reliable • for high volume applications

STRAPPER MARINE

- Easy to use
- Time saving
- Improve your presentation
- Quick pay back

Two direct drive motors.

Two motors.

Temperature control sensor.

Cooling time sensor.


Tension level display.

Electronic adjustable tension.

Assisted threading of strap.

On brake wheels.

**Strong and reliable technology
a perfect combination for
easy use**

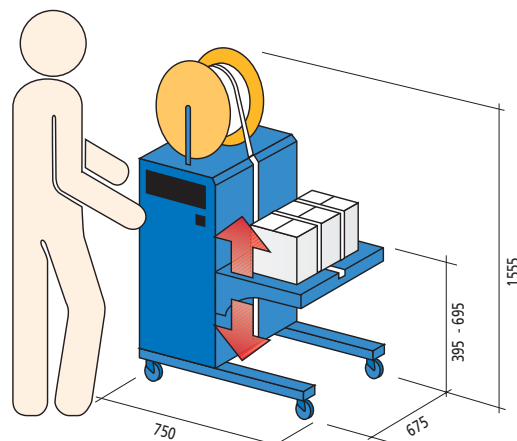

AUTOMATIC STRAPPING MACHINES



FOR THE FISH AND MEAT INDUSTRY

STRAPPER MATIC MARINE

- Automatic side sealer
- Operation with push buttons or foot pedal
- With gravity roller table
- With auto threading system
- Auto eject

Simple and reliable strapping head.

Electronic adjustable tension.

Adjustable temperature control (controls welding).

Adjustable cooling time (controls welding).



STRAPPER TRANSIT MARINE

Version of STRAPPER MARINE with motorized roller conveyor

Detection of the pack with 2 photocells

Ideal to integrate within a fully automatic box strapping line.

Three strapping modes:


- One single strap in the middle
- Two parallel straps
- Three parallel straps

Adjustable speed from 10 to 40 m/min.





Available arch sizes

mm	600	800
650	✱	✱
850	✱	✱

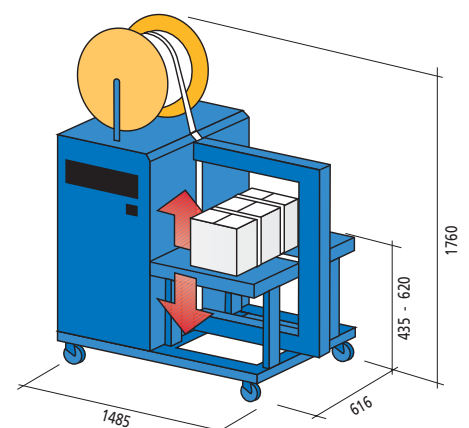

STRAPPER MARINE

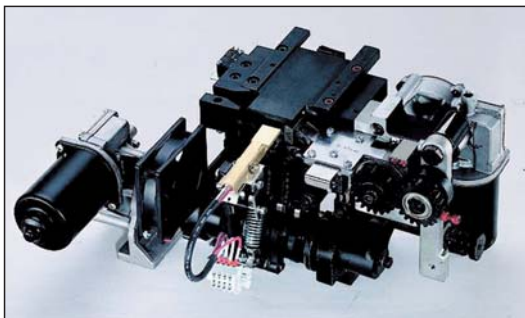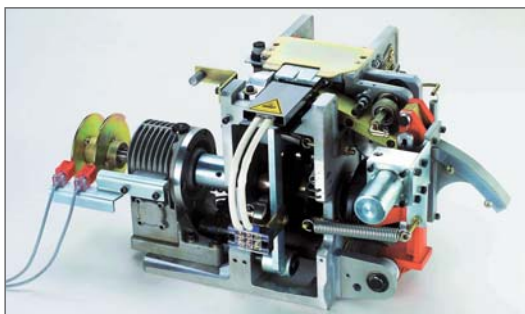

Manufactured completely of stainless steel, the frame, track and the most important parts of the head: presses, cutting blade, rollers...



	STRAPPER MARINE	STRAPPER MATIC MARINE	STRAPPER TRANSIT MARINE
Power supply	220 v - II -50 Hz	220 v - II -50 Hz	220/380 v - III -50 Hz
Electronically adjustable strap tension	5 - 70 Kgr	10 - 70 Kgr	10 - 70 Kgr
Power	0,5 KW	0,5 KW	1 KW
Strap width	6 / 8 / 12 mm	8 / 12 mm	8 / 12 mm
Strap thickness	0,55 a 0,8 mm	0,55 a 0,8 mm	0,55 a 0,8 mm
Ø Strap core size	200 mm	200 mm	200 mm
Height table	395 a 695 mm	435 a 620 mm	480 a 585 mm
Output (straps/minute)	29 minute	29 minute	8 a 9 paquetes/min. (2 flejes)
Weight	100 Kgr	336 Kgr	352 Kgr
Type of strap: PP y PET Heat seal			

SORSA keeps the right to make any change or modification without previous notification.

In compliance with CE standards.



SISTEMAS DE EMBALAJE SORSA S.A.

Polígono Industrial "Can Casablanco"
C/ Anoia, 2 (corner Berguedà)
08192 SANT QUIRZE DEL VALLÈS - Barcelona - España
Tel. *34 - 93 721 40 00 - Fax 34 - 93 721 44 40
e-mail: comer@sorsa.es - www.sorsa.es